


NOTE: PROVIDE 120/240V, 1Ø-3 WIRE SERVICE WITH GROUND.  
SERVICE ENTRANCE/ANCHOR BOLT LAYOUT

PULL BOX LOCATION

FLOOR CUT OUT/COVER LAYOUT

- a. SLOT IN FLOOR FOR ELECTRIC SERVICE ENTRANCE TO C.B. PANEL ABOVE
- b. CONCEALED 4" ANCHOR CHANNEL BAR WITH 3/4" ANCHOR BOLT HOLE, 4-REQ'D. AS SHOWN. ANCHOR BOLT AFTER FINAL LOCATION. ACCESS HOLE AND COVER PLATES PROVIDED. ANCHOR BOLTS NOT INCLUDED
- c. OUTER EDGE OF BASE
- d. CUSTOMER SUPPLIED AND INSTALLED 26" X 26" PULL BOX IN CONCRETE
- e. CLEAR FLOOR ACCESS OPENING WITH TWO PIECE REMOVABLE COVER PLATE
- f. FLOOR BRACING


1. COUNTER- 30" DEEP PAINTED GALVANIZED STEEL MOUNTED 32" ABOVE FLOOR.
2. PAINTED STORAGE DRAWER BENEATH COUNTER.
3. DOOR- 24" WIDE, SLIDING STEEL WITH WEATHER-STRIPPING, BALL BEARING HANGERS, SAFETY GLAZING, HEAVY DUTY TRACK, HOOK BOLT LOCK, & HARDWARE, 2-REQ'D.
4. HOLE IN COUNTER FOR DROP CORDS.
5. DUPLEX OUTLET- MOUNTED ABOVE COUNTER.
6. 2" X 4" JUNCTION BOX MOUNTED BELOW COUNTER HEIGHT WITH 1/2" RACEWAY TO 2" X 4" JUNCTION BOX NEAR FLOOR SLOT, 5-REQ'D AT EACH LOCATION.
7. PHONE JACK MOUNTED ABOVE COUNTER WITH RACEWAY TO JUNCTION BOX NEAR FLOOR SLOT.
8. LIGHT SWITCH MOUNTED ABOVE COUNTER FOR INTERIOR LIGHT.
9. LIGHT- 2-34 WATT LAMP FLUORESCENT LIGHT FIXTURE WITH LENS.
10. LIGHT SWITCH MOUNTED ABOVE COUNTER FOR EXTERIOR LIGHT.
11. QUARTZ EXTERIOR FLOOD LIGHT WITH 500 WATT LAMP, 2-REQ'D.
12. HEATER- 240V./5,600 WATT FAN FORCED WITH INTEGRAL THERMOSTAT CONTROL.
13. AIR CONDITIONER 120V./13,500 BTU ROOF MOUNTED WITH INTEGRAL THERMOSTAT CONTROL.
14. REMOVABLE ACCESS PANEL.
15. C.B. PANEL- 24 SPACE 120/240V, 1Ø-3 WIRE WITH GROUND BAR. 150 AMP MAIN BREAKER IS INCLUDED.
16. BLACK FABRIC TASK CHAIR. (SHIPPED LOOSE IN CARTON - INSTALLED BY OTHERS ON SITE)
17. WEATERPROOF JUNCTION BOX MOUNTED ABOVE ROOF WITH 3/4" RACEWAY TO JUNCTION NEAR FLOOR CUT OUT.

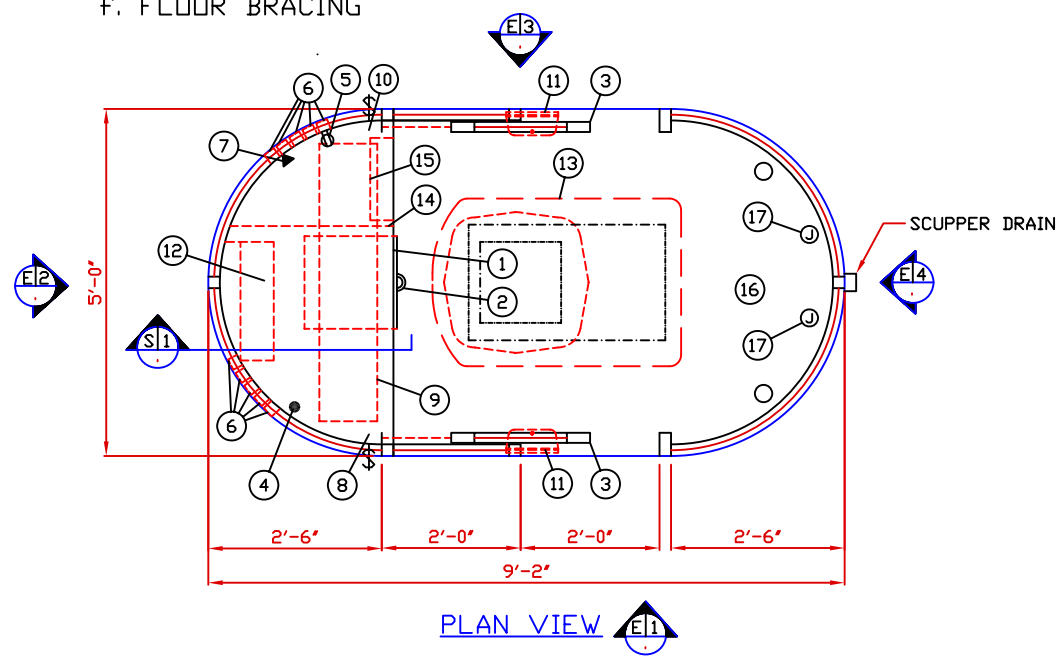

NOTE: PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED GALVANIZED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT.

- A. GLAZING TO BE TINTED POLYCARBONATE SAFETY GLAZING IN CURVED ENDS ONLY AND TINTED TEMPERED SAFETY GLAZING IN FLAT SIDES ONLY. ALL TO HAVE PAINTED STEEL EXTERIOR WINDOW FRAMES AND 3/4" ALUMINUM INTERIOR GLAZING STOPS.
- B. PAINT- A RUST INHIBITIVE PRIMER WITH AN INDUSTRIAL FINISH.
- C. ELECTRICAL- ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN 1/2"(MIN) E.M.T. PER NATIONAL ELECTRIC CODE. FITTINGS, FIXTURES & DEVICES ARE U.L. LABELED. ALL WIRING TO TERMINATE AT C.B. PANEL. ALL CIRCUITS HAVE GREEN GROUND WIRE.
- D. BOOTH WILL NOT HAVE A CANOPY OVERHANG.
- E. LIFTING RING(S) ARE PROVIDED IN ROOF.
- F. NO ON SITE WORK BY PAR-KUT.

GENERAL NOTES		
PAINT COLOR: (PLEASE SPECIFY COLOR)		



NOTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT INTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY MANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY AS A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHED BY PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES TO DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. REVISIONS MAY NOT BE NOTED.

PAR-KUT INTERNATIONAL, INC.  
 40961 Production Drive  
 Harrison Twp, Mich.  
 48049-1351  
 PH. (586) 468-2947

**PAR-KUT**

DWG# **CRV-005** SHEET **A-1**

5' X 9' CURVUE

DATE	NTS	SCALE	PK#

DATE	SIZE	QTY	REVISIONS
	5' X 9'-2"		

CHK'D BY: SALES REPRESENTATIVE