


SERVICE ENTRANCE/ANCHOR BOLT LAYOUT


1. DOOR- 32" WIDE, SWINGING STEEL WITH WEATHER-STRIPPING, BALL BEARING BUTTS, SAFETY GLAZING, KEY IN KNOB LOCK, & HARDWARE.
2. ANCHOR CLIP- 2" X 2" STEEL WELDED TO BASE AT GRADE WITH 3/4" ANCHOR BOLT HOLE. 4-REQ'D. ANCHOR BOLT AFTER FINAL LOCATION. ANCHOR BOLTS NOT INCLUDED.

NOTE: PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED GALVANIZED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT.

- A. GLAZING TO BE OPTIONAL 1/4" GRAY TINTED TEMPERED SAFETY GLASS WITH STEEL GLASS STOPS.
- B. PAINT- A RUST INHIBITIVE PRIMER WITH INDUSTRIAL FINISH.
- C. ELECTRICAL- NONE BY PAR-KUT.
- D. BOOTH WILL NOT HAVE A CANOPY OVERHANG.
- E. OPTIONAL REMOVABLE LIFTING RING(S) ARE PROVIDED IN ROOF.
- F. NO ON SITE WORK BY PAR-KUT.

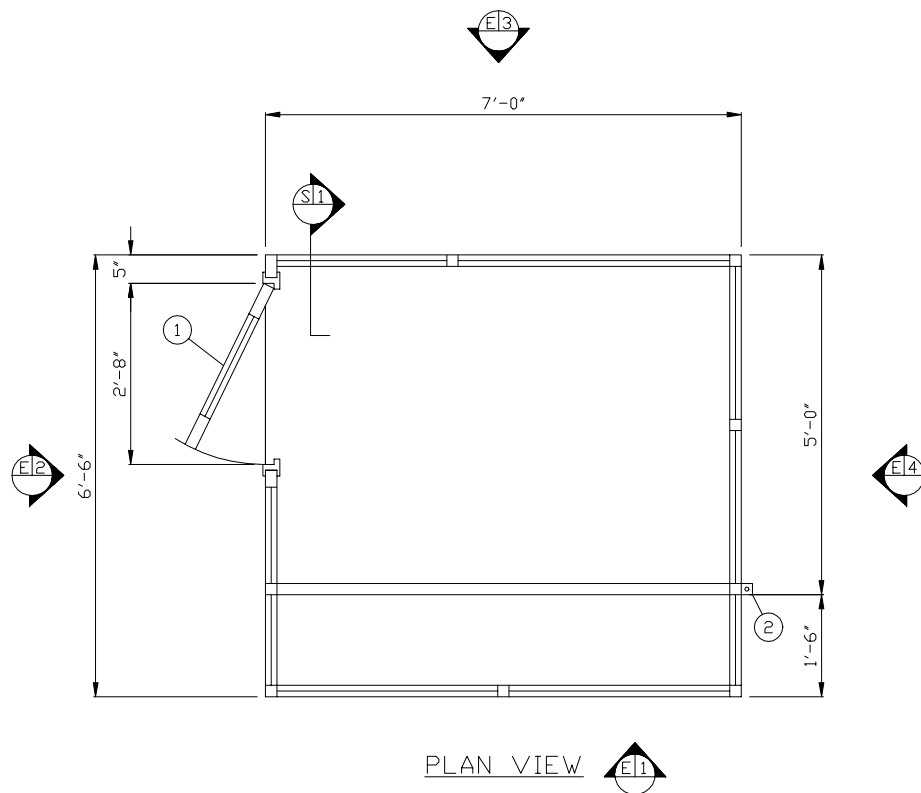

PLAN VIEW



NOTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT INTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY MANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY AS A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHED BY PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES TO DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. REVISIONS MAY NOT BE NOTED.

PAR-KUT INTERNATIONAL, INC.
40961 Production Drive
Harrison Twp, Mich.
48045-1351
PH. (810) 468-2947



DWG# 0010 SHEET A-1
#75-SLT-12

A/E NOTES		
OPTIONAL INTERIOR PAINT COLOR:	SCALE	DRAWN BY
EXTERIOR PAINT COLOR:	NTS	AJP / DLT
	DATE	REVISED
	7-25-2000	SIZE
	5' X 7'	QTY
CHK'D BY:	REVISION(S) CHK'D BY:	